

CL1008/1016 (CL1008M: 17" LCD; CL1016M: 17" LCD)

Slideaway™ LCD KVM Switch


- The CL1008 / CL1016 LCD KVM Switch series are control units that allow access to multiple computers from a single keyboard, video, and mouse (KVM), console. A single CL1008 or CL1016 can control up to 8 or 16 computers. As many as 15 additional KVM switches can be daisy-chained to the CL1008 / CL1016, so that up to 256 computers can all be controlled from a single KVM console.

The CL1008 / CL1016 offers a space-saving, streamlined approach to KVM switch technology by integrating a keyboard, 17" LED-backlit LCD monitor, and touchpad in a 1U rack-mountable sliding housing.



Features

- Exclusive LED illumination light - designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- KVM console with 17" LED-backlit LCD monitor in a sliding housing with top and bottom clearance for smooth operation in a 1U high system rack
- LCD module rotates up to 115 degrees for a more comfortable viewing angle
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Daisy-chain up to 15 additional units – control up to 256 computers
- No software required – convenient computer selection via hotkeys and mouse driven intuitive on screen display (OSD) menus
- Auto Scan feature for monitoring user-selected computers
- Broadcast support – commands from the keyboard can be broadcast to all available computers on the installation
- Hot pluggable – add or remove computers without having to power down the switch
- Two level password security – only authorized users view and control the computers; up to four users plus an administrator with separate profiles for each
- Video settings of attached computers are automatically adjusted for optimal output to the LCD monitor
- Upgradable firmware
- Keyboard Language support: Keyboard Language supports English (US), English (UK), French, German, German (Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish and Traditional Chinese

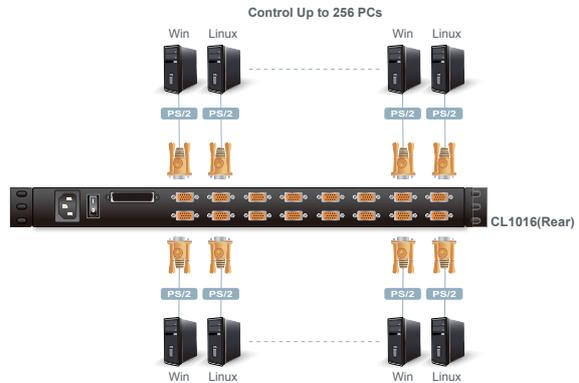

| Rack Mount Kit | Depth (cm) |
|------------------|------------|
| Long (Optional) | 68 - 105 |
| Short (Standard) | 42 - 82 |

| Easy Installation Rack Mount Kit | Depth (cm) |
|----------------------------------|------------|
| Long (Optional) | 68 - 105 |
| Short (Optional) | 52 - 70 |

Specification

| Function | | CL1008 | CL1016 | |
|----------------------|----------------------------|------------------------------|---------------------------|-------------------------|
| Computer Connections | Direct | 8 | 16 | |
| | Max | 128 (via Daisy-chain) | 256 (via Daisy-chain) | |
| Port Selection | | OSD; Hotkey; Pushbutton | | |
| Connectors | KVM Ports | 8 x SPHD Female (Yellow) | 16 x SPHD Female (Yellow) | |
| | Daisy-Chain | 1 x DB-25 Male | | |
| | FW Upgrade | 1 x RJ-11 Female | | |
| | Power | 1 x 3-prong AC socket | | |
| Switches | Reset | 1 x Semi-recessed pushbutton | | |
| | Power | 1 x Rocker | | |
| | FW Upgrade | 1 x Slide | | |
| | LCD Adjust | 4 x Pushbutton | | |
| LEDs | Port Selection | 8 x Pushbutton | 16 x Pushbutton | |
| | On Line | 8 (Orange) | 16 (Orange) | |
| | Selected | 8 (Green) | 16 (Green) | |
| | Power | 1 (Dark Green) | | |
| Emulation | Keyboard / Mouse | PS/2 | | |
| | Video | 17" LCD | | |
| | Scan Interval (OSD Select) | 1-255 Seconds | | |
| I/P Rating | 100-240V AC; 50/60Hz; 1A | | | |
| Power Consumption | 17" LCD | 120V, 15W /230V, 17W | 120V, 18W /230V, 20W | |
| Environment | Operating Temp. | 0-40°C | | |
| | Storage Temp. | -20-60°C | | |
| | Humidity | 0-80% RH-condensing | | |
| Physical Properties | Housing | Metal+Plastic | | |
| | Weight | 17" LCD | 13.34 kg | 13.55 kg |
| | Dimensions (L x W x H) | 48.00 x 64.02 x 4.40 cm | | 48.00 x 64.02 x 4.40 cm |

* The specifications and pictures are subject to change without notice.