


ACE-R4130AP


300 W ATX Mini Redundant Power Supply

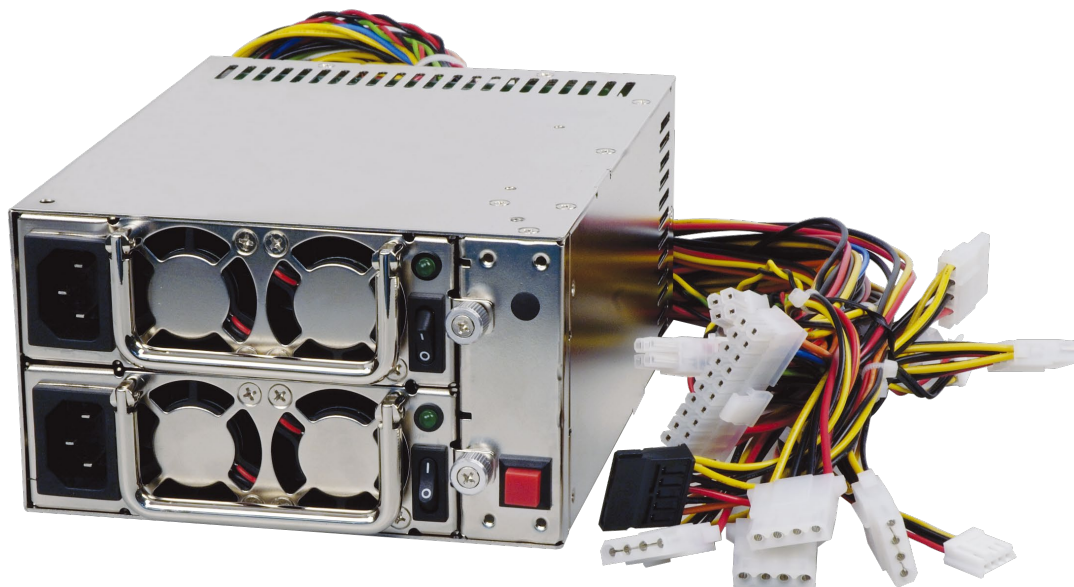

Specifications

Input	Voltage	90 ~ 264 VAC Full Range		
	Frequency	47 Hz ~ 63 Hz		
	Input Current	6 A (RMS) @110 VAC, 3 A (RMS) @220 VAC		
	Inrush Current	60 A max. for 110 VAC, 80 A max. for 220 VAC		
Output	Voltage	Min. load	Max. load	Ripple & Noise
	+5 V	3 A	25 A	50mV P-P
	+12 V	2 A	16 A	120mV P-P
	-5 V	0 A	0.5 A	150mV P-P
	-12 V	0 A	0.5 A	150mV P-P
	+3.3 V	1 A	18 A	50mV P-P
	+5 Vsb	0.1 A	2 A	60mV P-P
*Total current of +5 V and + 3.3 V not exceed 35 A				
*Total current of +5 V, +3.3 V and +12 V not exceed 282 W				
General Specifications	Watt	300 W		
	Hold-up Time	16 ms min.		
	Efficiency	65% min.		
	MTBF	160,000 hours		
	Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C		
	Dimensions	185 x 150 x 86 (mm), 7.28 x 5.91 x 3.39 (inch)		
	Output Connector	1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power		

Dimensions (Unit: mm)

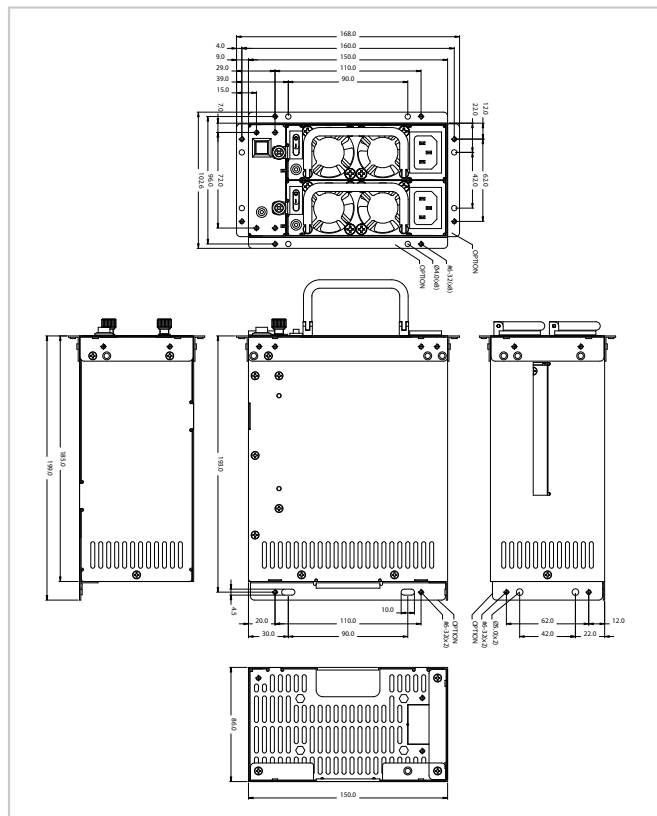

Ordering Information

Part No.	Description
ACE-R4130AP-RS	300 W Mini Redundant ATX Power Supply, with PFC
ACE-R4130AP1-RS	300 W AC-DC ATX Redundant Module, for ACE-R4130AP, with PFC